




Filtreau UV-C Eco	16W / UVE0001	40W / UVE0002	80W / UVE0003
Rc. flow for 30 mJ/cm ²	12 m ³ /h	18 m ³ /h	22 m ³ /h
Max. pressure	3.0 bar	3.0 bar	3.0 bar
Diameter unit Ø	88.9 mm	88.9 mm	88.9 mm
Length unit	540 mm	960 mm	960 mm
Diameter in-outlet Ø	63/50/40/32/25 mm	63/50/40/32/25 mm	63/50/40/32/25 mm
Housing	Aluminium	Aluminium	Aluminium
Electronic ballast	230V AC 50/60 Hz	230V AC 50/60 Hz	230V AC 50/60 Hz
Maximum current	0,425 A	0,425 A	0,8 A
Lamp power	16W	40W	80W
Lifespan lamp	9.000 h	9.000 h	9.000 h
Indicator	-	-	-
Quantity full pallet	40	30	30

Spareparts	16W / UVE0001	40W / UVE0002	80W / UVE0003
Replacement lamp	RLE0001	RLE0002	RLE0003
Quartz sleeve	QS0001	QS0002	QS0002
Electrical part	EPE0001	EPE0002	EPE0003
Housing	HOU0008	HOU0009	HOU0009

ADVANTAGES

- Eco-friendly design.
- Extra-large housing for longer contact time.
- Incl. reductionpieces Ø 50 / 40 / 32 / 25 mm.
- Bottom outlet, 360° installation.

FILTREAU™ UV-C POND BASIC



Filtreau UV-C Pond Basic	16W / UVB0001	40W / UVB0002	80W / UVB0003
Rc. flow for 30 mJ/cm ²	12 m ³ /h	18 m ³ /h	22 m ³ /h
Max. pressure	3.0 bar	3.0 bar	3.0 bar
Diameter unit Ø	88.9 mm	88.9 mm	88.9 mm
Length unit	540 mm	960 mm	960 mm
Diameter in-outlet Ø	63/50/40/32/25 mm	63/50/40/32/25 mm	63/50/40/32/25 mm
Housing	SS 304	SS 304	SS 304
Electronic ballast	230V AC 50/60 Hz	230V AC 50/60 Hz	230V AC 50/60 Hz
Maximum current	0,425 A	0,425 A	0,8 A
Lamp power	16W	40W	75W
Lifespan lamp	9.000 h	9.000 h	9.000 h
Indicator	-	-	-
Quantity full pallet	40	30	30

Spareparts	16W / UVB0001	40W / UVB0002	80W / UVB0003
Replacement lamp	RLB0001	RLB0002	RLB0003
Quartz sleeve	QS0001	QS0002	QS0002
Electrical part	EPB0001	EPB0002	EPB0003
Housing	HOU0001	HOU0002	HOU0002

ADVANTAGES

- Polished interior results in 35% more UV-C radiation.
- Extra-large SS 304 housing for longer contact time.
- 30 mJ at recommended waterflow.
- Philips UV-C technology lamps.

FILTREAU™ UV-C SELECT




Filtreau UV-C Select	40W / UVS0001	80W / UVS0002	120W Amalgam / UVS0003
Rc. flow for 30 mJ/cm ²	18 m ³ /h	22 m ³ /h	28 m ³ /h
Max. pressure	3.0 bar	3.0 bar	3.0 bar
Diameter unit Ø	88.9 mm	88.9 mm	88.9 mm
Length unit	960 mm	960 mm	960 mm
Diameter in-outlet Ø	63 mm	63 mm	63 mm
Housing	SS 316	SS 316	SS 316
Electronic ballast	230V AC 50/60 Hz	230V AC 50/60 Hz	230V AC 50/60 Hz
Maximum current	0,425 A	0,8 A	1.2 A
Lamp power	40W	80W	120W Amalgam
Lifespan lamp	12.000 h	12.000 h	12.000 h
Indicator	✓	✓	✓
Quantity full pallet	30	30	30

Spareparts	40W / UVS0001	80W / UVS0002	120W Amalgam / UVS0003
Replacement lamp	RLS0001	RLS0002	RLS0003
Quartz sleeve	QS0002	QS0002	QS0002
Electrical part	EPS0001	EPS0002	EPS0003
Housing	HOU0004	HOU0004	HOU0004

ADVANTAGES

- LED timer indicator.
- Extra-large SS 316 housing for longer contact time.
- Polished interior results in 35% more UV-C radiation.
- 47 mJ at recommended waterflow.
- Extreme high-output UV-C lamp incl. long-life.
- Philips UV-C technology lamps.

FILTREAU™ UV-C COMPACT



Filtreau UV-C Compact	16W / UVCOM01	40W / UVCOM02	75W / UVCOM03
Rc. flow for 30 mJ/cm ²	12 m ³ /h	18 m ³ /h	22 m ³ /h
Max. pressure	3.0 bar	3.0 bar	3.0 bar
Diameter unit Ø	70 mm	70 mm	70 mm
Length unit	430 mm	740 mm	740 mm
Diameter in-outlet Ø	63/50/40/32/25 mm	63/50/40/32/25 mm	63/50/40/32/25 mm
Housing	Aluminium	Aluminium	Aluminium
Electronic ballast	230V AC 50/60 Hz	230V AC 50/60 Hz	230V AC 50/60 Hz
Maximum current	0,425 A	0,425 A	0,425 A
Lamp power	16W	40W	75W
Lifespan lamp	9.000 h	9.000 h	9.000 h
Indicator	-	-	-
Quantity full pallet	60	60	60

Spareparts	16W / UVCOM01	40W / UVCOM02	75W / UVCOM03
Replacement lamp	RLCOM01	RLCOM02	RLCOM03
Quartz sleeve	QS0001	QS0007	QS0007
Electrical part	EPS0001	EPS0002	EPS0003
Housing	HOU0015	HOU0016	HOU0016

ADVANTAGES

- Small compact design.
- Incl. reduction pieces 63/50/40/32/25 mm.
- 3 x in/outlet possibilities.
- 360° installation.

FILTREAU™ UV-C MODULE AMALGAM



Filtreau UV-C Module Amalgam	40W Amalgam / UVM0001	40W Amalgam / UVM0002 (incl. timer)	80W Amalgam / UVM0003	80W Amalgam / UVM0004 (incl. timer)
Rc. flow for 30 mJ/cm ²	18 m ³ /h	18 m ³ /h	22 m ³ /h	22 m ³ /h
Max. pressure	3.0 bar	3.0 bar	3.0 bar	3.0 bar
Diameter unit Ø	-	-	-	-
Length unit	360 mm	360 mm	660 mm	660 mm
Diameter in-outlet Ø	-	-	-	-
Length cable	5 meters	5 meters	5 meters	5 meters
Electronic ballast	230V AC 50/60 Hz	230V AC 50/60 Hz	230V AC 50/60 Hz	230V AC 50/60 Hz
Maximum current	1,2 A	1,2 A	1,2 A	1,2 A
Lamp power	40W Amalgam	40W Amalgam	80W Amalgam	80W Amalgam
Lifespan lamp	12.000 h	12.000 h	12.000 h	12.000 h
Indicator	-	✓	-	✓
Quantity full pallet	40	40	40	40

Spareparts	40W Amalgam / UVM0001	40W Amalgam / UVM0002 (incl. timer)	80W Amalgam / UVM0003	80W Amalgam / UVM0004 (incl. timer)
Replacement lamp	RLM0001	RLM0002	RLM0002	RLM0002
Quartz sleeve	QS0003	QS0003	QS0003	QS0003
Electrical part	EPM0001	EPM0004	EPM0003	EPM0004

ADVANTAGES

- Incl. tankconnector.
- Easy installation.
- Optional: LED timer indicator.
- Can be installed in the most narrow places.
- Very short build-in length.

FILTREAU™ UV-C MODULE

HIGH-OUTPUT



Filtreau UV-C Module HO	40W High-Output / UVM0020	80W High-Output / UVM0021
Rc. flow for 30 mJ/cm ²	18 m ³ /h	22 m ³ /h
Max. pressure	3.0 bar	3.0 bar
Diameter unit Ø	-	-
Length unit	360 mm	660 mm
Diameter in-outlet Ø	-	-
Length cable	5 meters	5 meters
Electronic ballast	230V AC 50/60 Hz	230V AC 50/60 Hz
Maximum current	0,8 A	1,2 A
Lamp power	40W High-Output	80W High-Output
Lifespan lamp	12.000 h	12.000 h
Indicator	-	-
Quantity full pallet	40	40

Spareparts	40W High-Output / UVM0020	80W High-Output / UVM0021
Replacement lamp	RLM0020	RLM0021
Quartz sleeve	QS0001	QS0003
Electrical part	EPM0020	EPM0021

ADVANTAGES

- High-Output is better resistant to overheating (running dry)
- Incl. tankconnector.
- Easy installation.
- Optional: LED timer indicator.
- Can be installed in the most narrow places.
- Very short build-in length.

FILTREAU™ UV-C INOX MODULE



Filtreau UV-C INOX Module	40W Amalgam / UVM0001SS*	80W Amalgam / UVM0003SS*	40W High-Output / UVM0020SS*	80W High-Output / UVM0021SS*
Rc. flow for 30 mJ/cm ²	18 m ³ /h	22 m ³ /h	18 m ³ /h	22 m ³ /h
Max. pressure	3.0 bar	3.0 bar	3.0 bar	3.0 bar
Diameter unit Ø	-	-	-	-
Length unit	360 mm	660 mm	360 mm	660 mm
Diameter in-outlet Ø	-	-	-	-
Length cable	5 meters	5 meters	5 meters	5 meters
Electronic ballast	230V AC 50/60 Hz	230V AC 50/60 Hz	230V AC 50/60 Hz	230V AC 50/60 Hz
Maximum current	0,8 A	1,2 A	0,8 A	1,2 A
Lamp power	40W Amalgam	80W Amalgam	40W High-Output	80W High-Output
Lifespan lamp	12.000 h	12.000 h	12.000 h	12.000 h
Indicator	-	-	-	-
Quantity full pallet	40	40	40	40

Spareparts	40W Amalgam / UVM0001SS*	80W Amalgam / UVM0003SS*	40W High-Output / UVM0020SS*	80W High-Output / UVM0021SS*
Replacement lamp	RLM0001	RLM0002	RLM0020	RLM0021
Quartz sleeve	QS0005	QS0006	QS0005	QS0006
Electrical part	EPM0003 SS	EPM0001 SS	EPM0020 SS	EPM0021 SS

ADVANTAGES

- Aquaculture and horticulture proof.
- Fully made of SS 316.
- Incl. tankconnector and locknut SS 316.
- Very short build-in length.

FILTREAU™ DRUMFILTER




Filtreau Drumfilter	Gravity fed / TR00001	Pump fed / TR00003
Max. flow	20 m ³ /h	15 m ³ /h
Dimensions unit	940x485x535 mm	940x485x534 mm
Qty in-outlet	2X in / 1X out	2X in / 1X out
Diameter in-outlet Ø	110/110 mm	110/110 mm
Housing	PU	PU
Electronics	230V AC 50/60Hz	230V AC 50/60Hz
UV-C	40W Amalgam	40W Amalgam
Lifespan lamp	12.000 h	12.000 h
Indicator	✓	✓
Quantity full pallet (120x100)	6	6

Extra 110 mm
inlet / outlet
available



Spareparts	Gravity fed / TR00001	Pump fed / TR00003
Replacement lamp	RLM0001	RLM0001
Quartz sleeve	QS0001	QS0001
Electrical part	EPM0002	EPM0002
Controlbox	CBT0001	CBT0001
Floatswitch incl. SS bracket	3000040	3000040PF
Gearmotor	3000019	3000019
Extension cord Floatswitch (2m)	3001084	3001084
External rinsepump	3000033	3000033
Filterscreen 70micron standard	ZS00001B (20pcs)	ZS00001B (20pcs)
Filterscreen 70micron High-flow	ZH00001B (20pcs)	ZH00001B (20pcs)
Filterscreen 120micron standard	ZS00003B (20pcs)	ZS00003B (20pcs)
Filterscreen 120micron High-flow	ZH00003B (20pcs)	ZH00003B (20pcs)

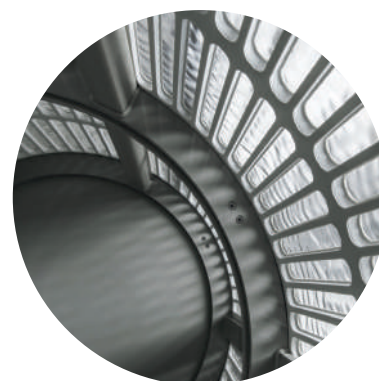

Screenfilter
Various sizes
available

ADVANTAGES

- Fully automatic filtersystem.
- Energy efficient and environmentally friendly.
- Compact design.
- Easy installation.
- Max. flow 20 m³/h.

FILTREAU™ DRUMFILTER HF30



Filtreau Drumfilter HF30	Gravity fed / TR00004	Pump fed / TR00005
Max. flow	30 m ³ /h	20 m ³ /h
Dimensions unit	840x480x510 mm	840x480x510 mm
Qty in-outlet	2X in / 2X out	2X in / 2X out
Diameter in-outlet Ø	110/110 mm	110/110 mm
Housing	PP	PP
Electronics	230V AC 50/60Hz	230V AC 50/60Hz
UV-C	Optional	Optional
Lifespan lamp	12.000 h	12.000 h
Indicator	-	-
Quantity full pallet	6	6


Spareparts	Gravity fed / TR00004	Pump fed / TR00005
Replacement lamp	RLM0020	RLM0020
Quartz sleeve	QS0001	QS0001
Electrical part	EPM0020	EPM0020
Controlbox	CBT0001	CBT0001
Floatswitch incl. SS bracket	3000040	3000040PF
Gearmotor	3000019	3000019
Extension cord Floatswitch (2m)	3001084	3001084
External rinsepump	3000033	3000033
Filterscreen 70micron standard	ZS00001B (20pcs)	ZS00001B (20pcs)
Filterscreen 70micron High-flow	ZH00001B (20pcs)	ZH00001B (20pcs)
Filterscreen 120micron standard	ZS00003B (20pcs)	ZS00003B (20pcs)
Filterscreen 120micron High-flow	ZH00003B (20pcs)	ZH00003B (20pcs)



ADVANTAGES

- 2x inlet 110 mm / 2x outlet 110 mm.
- Energy efficient and environmentally friendly.
- For (Koi)ponds up to 50 m³.
- Equipped with high-flow panel.
- Max. flow 30 m³/h.

FILTREAU™ COMBI NEXT



Filtreau Combi Next	Gravity fed / COM0002	Pump fed / COM0002PF
Max. flow	30 m ³ /h	20 m ³ /h
Dimensions unit	1.040x920x1020 mm	1.040x920x1020 mm
Qty in-outlet	3X in / 2X out	3X in / 2X out
Diameter in-outlet Ø	110/110 mm	110/110 mm
Housing	PP	PP
Electronics	230V AC 50/60Hz	230V AC 50/60Hz
UV-C	40W Amalgam	40W Amalgam
Internal rinsepump (optional)	✓	✓
Lifespan lamp	12.000 h	12.000 h
Indicator	✓	✓
Quantity full pallet (120x100)	2	2



Spareparts	Gravity fed / COM0002	Pump fed / COM0002PF
Replacement lamp	RLM0001	RLM0001
Quartz sleeve	QS0001	QS0001
Electrical part	EPM0002	EPM0002
Controlbox	CBT0001	CBT0001
Floatswitch incl. SS bracket	3000040	3000040PF
Gearmotor	3000019	3000019
Extension cord Floatswitch (2m)	3001084	3001084
Internal rinsepump	3001134	3001134
Filterscreen 70micron standard	ZS00001B (20pcs)	ZS00001B (20pcs)
Filterscreen 70micron High-flow	ZH00001B (20pcs)	ZH00001B (20pcs)
Filterscreen 120micron standard	ZS00003B (20pcs)	ZS00003B (20pcs)
Filterscreen 120micron High-flow	ZH00003B (20pcs)	ZH00003B (20pcs)

ADVANTAGES

- 3x inlet 110 mm / 2x outlet 110 mm.
- For (Koi)ponds up to 50 m³.
- Room for max. 100L biocarrier.
- Plug & Play
- Max. flow 30 m³/h.

FILTREAU™ COMBI 50XL



Filtreau Combi 50XL	Gravity fed / COM0050IN	Pump fed / COM0050PFIN
Max. flow	40 m ³ /h	40 m ³ /h
Dimensions unit	1.270 x 900 x 1030 mm	1.270 x 900 x 1030 mm
Qty in-outlet	4x in / 3 outlet	4x in / 3 outlet
Diameter in-outlet Ø	110/110 mm	110/110 mm
Housing	PP	PP
Electronics	230V AC 50/60Hz	230V AC 50/60Hz
UV-C	2x 40W Amalgam	2x 40W Amalgam
Internal rinsepump (optional)	✓	✓
Lifespan lamp	12.000 h	12.000 h
Quantity full pallet (145x90)	1	1



Cover lid for UV-C



Spareparts	Gravity fed / COM0050IN	Pump fed / COM0050PFIN
Replacement lamp	RLM0001 (2)	RLM0001 (2)
Quartz sleeve	QS0001 (2)	QS0001 (2)
Electrical part	EPM0002	EPM0002
Controlbox	CBT0001	CBT0001
Floatswitch	3000045	3000045
XL SPG-engine	3001245	3001245
Filterscreen High-flow	ZH00005 (2)	ZH00005 (2)
Double powerstrip	3001287	3001287



ADVANTAGES


- 4x inlet 110 mm / 3x outlet 110 mm.
- Air diffuser disc
- Base plate 15 mm thick
- Cover lid for UV-C

FILTREAU™ TRICKLEFILTER

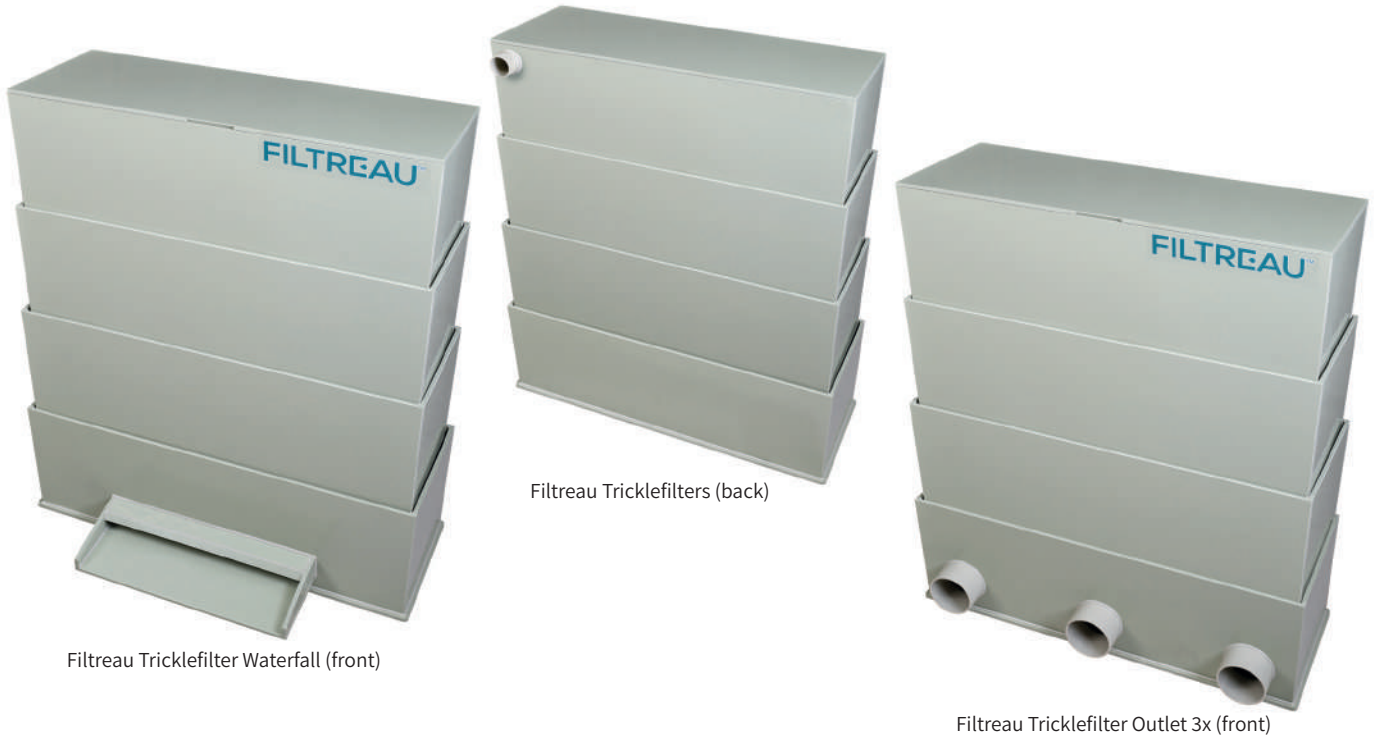

Filtreau Tricklefilters	Waterfall / TRI0001	Outlet 3x 110 mm / TRI0002
Max. flow	20 m ³ /h	20 m ³ /h
Dimensions unit	935 x 460 x 1.170 mm	935 x 460 x 1.170 mm
Qty in-outlet	1x In / 1x waterfall out 500 x 190 mm	1x In / 3x out 110 mm
Connection	1 x 63 mm 2" thread	1 x 63 mm 2" thread
Housing	PP	PP
Spray tube	2 x 63 mm	2 x 63 mm
Quantity full pallet	2	2

Spareparts	Waterfall / TRI0001	Outlet 3x 110 mm / TRI0002
Replacement grid (250 x 435 mm)	3001274	3001274

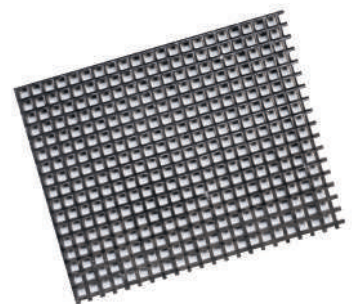

ADVANTAGES

- Filter material to be used: Japanese mats, Zeolite Lava
- High Oxygen increase
- The filter has the best biological effect

FILTREAU™ COMBI AFTER




Filtreau Combi After	Gravity fed / COM0003	Pump fed / COM0003PF
Max. flow	30 m ³ /h	30 m ³ /h
Dimensions unit	1.730x570x1.020 mm	1.730x570x1.020 mm
Qty in-outlet	3X in / 2X out	3X in / 2X out
Diameter in-outlet Ø	110/110 mm	110/110 mm
Housing	PP	PP
Electronics	230V AC 50/60Hz	230V AC 50/60Hz
UV-C	40W High-Output	40W High-Output
Internal rinsepump (optional)	✓	✓
Lifespan lamp	12.000 h	12.000 h
Indicator	-	-
Quantity full pallet (180x120)	2	2

Spareparts	Gravity fed / COM0003	Pump fed / COM0003PF
Replacement lamp	RLM0020	RLM0020
Quartz sleeve	QS0001	QS0001
Electrical part	EPM0020	EPM0020
Controlbox	CBT0001	CBT0001
Floatswitch incl. SS bracket	3000040	3000040PF
Gearmotor	3000019	3000019
Extension cord Floatswitch (2m)	3001084	3001084
Internal rinsepump (deep-well)	3001134	3001134
Filterscreen 70micron standard	ZS00001B (20pcs)	ZS00001B (20pcs)
Filterscreen 70micron High-flow	ZH00001B (20pcs)	ZH00001B (20pcs)
Filterscreen 120micron standard	ZS00003B (20pcs)	ZS00003B (20pcs)
Filterscreen 120micron High-flow	ZH00003B (20pcs)	ZH00003B (20pcs)



ADVANTAGES

- 3x inlet 110 mm / 3x outlet 110 mm.
- For (Koi)ponds up to 50 m³.
- Room for max. 100L biocarrier.
- Plug & Play
- Max. flow 30 m³/h.




Filtreau Combi PF20	Pump fed / COM0001
Max. flow	20 m ³ /h
Dimensions unit	840x540x1.250 mm
Qty in-outlet	2X in / 2X out
Diameter in-outlet Ø	110/110 mm
Housing	PP
Electronics	230V AC 50/60Hz
Quantity full pallet (120x100)	2

Spareparts	Pump fed / COM0001
Controlbox	CBT0001
Floatswitch incl. SS bracket	3000040PF
Gearmotor	3000019
Extension cord Floatswitch (2m)	3001084
External rinsepump	3000033
Filterscreen 70micron standard	ZS00001B (20pcs)
Filterscreen 70micron High-flow	ZH00001B (20pcs)
Filterscreen 120micron standard	ZS00003B (20pcs)
Filterscreen 120micron High-flow	ZH00003B (20pcs)

ADVANTAGES

- Especially for pump fed filtration
- For (Koi)ponds up to 30 m³.
- Room for max. 50L biocarrier.
- Plug & Play
- Space-saving design
- Max. flow 20 m³/h.

FILTREAU™ MOVING BED



Filtreau Moving bed 190L (bio-chamber)	BB00001
Max. flow	20 m ³ /h (per 2X inlet / 2X outlet)
Dimensions unit	550x550x750 mm
Qty in-outlet	1X in / 1X out (optional: extra in/outlets)
Diameter in-outlet Ø	110/110 mm
Housing	PE
Quantity full pallet (120x80)	6

Spareparts	BB00001
Connectors 110mm	CO00001 (12pcs)
Gridtube 200cm	3001038
Cap for gridtube	3001047
Complete set in/outlet incl. gridtube+cap	3001063
Air disc infuser 9"	3001031
Empty housing incl. lid	3001121

ADVANTAGES

- Optional with more in/outlets.
- Incl. 9" disc diffuser.
- Room for max. 50L biocarrier.
- Other dimensions up on request.

FILTREAU™ COMBI-2 (+ MOVING BED)




Filtreau Combi-2 (+ Moving bed)	Gravity fed / COM0020	Pump fed / COM0020PF
Max. flow	15 m ³ /h	10 m ³ /h
Dimensions unit	1.005x920x555 mm	1.005x920x555 mm
Qty in-outlet	2X in / 1X out	2X in / 1X out
Diameter in-outlet Ø	110/110 mm	110/110 mm
Housing	PP	PP
Electronics	230V AC 50/60Hz	230V AC 50/60Hz
UV-C	40W High-Output	40W High-Output
Lifespan lamp	12.000 h	12.000 h
Quantity full pallet (120x100)	3	3

Spareparts	Gravity fed / COM0020	Pump fed / COM0020PF
Replacement lamp	RLM0020	RLM0020
Quartz sleeve	QS0001	QS0001
Electrical part	EPM0020	EPM0020
Controlbox	CBT0001	CBT0001
Floatswitch incl. SS bracket	3000040	3000040PF
Gearmotor	3000019	3000019
Extension cord Floatswitch (2m)	3001084	3001084
Internal rinsepump	3001081	3001081
Extra HEL-X biocarrier (100L)	3001139	3001139
Filterscreen 70micron standard	ZS00001B (20pcs)	ZS00001B (20pcs)
Filterscreen 70micron High-flow	ZH00001B (20pcs)	ZH00001B (20pcs)
Filterscreen 120micron standard	ZS00003B (20pcs)	ZS00003B (20pcs)
Filterscreen 120micron High-flow	ZH00003B (20pcs)	ZH00003B (20pcs)

ADVANTAGES

- Very low build-in height.
- Plug & Play.
- Brass (angled) nozzles.
- Original HEL-X biocarrier inside.
- Max. flow 15 m³/h.

FILTREAU™ COMBI-2 (+ JAPANESE MATS)

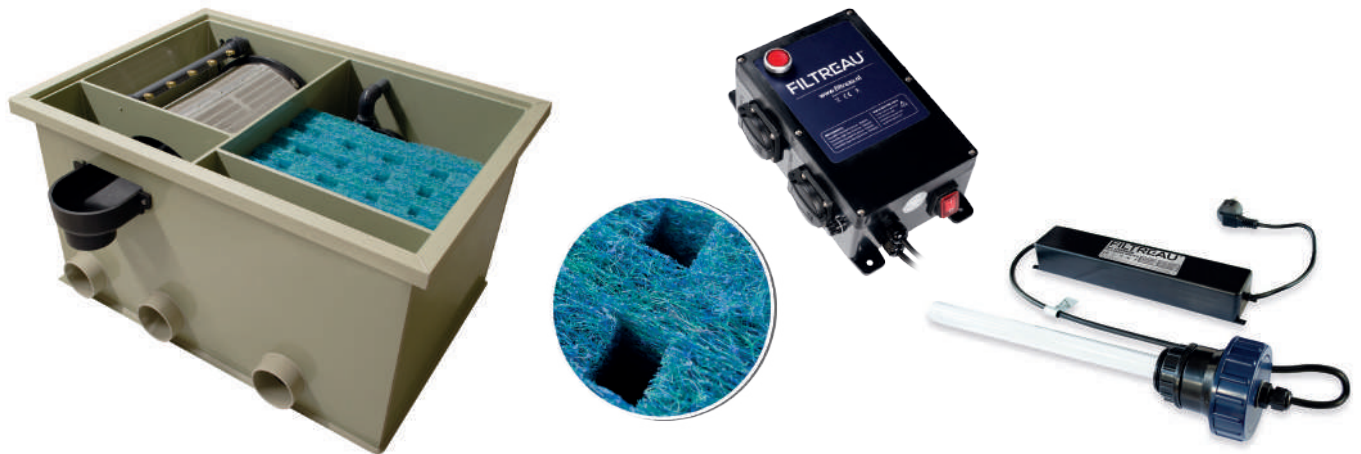

Filtreau Combi-2 (+ Japanese mats)	Gravity fed / COM0021	Pump fed / COM0021PF
Max. flow	15 m ³ /h	10 m ³ /h
Dimensions unit	1.005x920x555 mm	1.005x920x555 mm
Qty in-outlet	2X in / 1X out	2X in / 1X out
Diameter in-outlet Ø	110/110 mm	110/110 mm
Housing	PP	PP
Electronics	230V AC 50/60Hz	230V AC 50/60Hz
UV-C	40W High-Output	40W High-Output
Internal rinsepump (optional)	✓	✓
Lifespan lamp	12.000 h	12.000 h
Quantity full pallet (120x100)	3	3

Spareparts	Gravity fed / COM0021	Pump fed / COM0021PF
Replacement lamp	RLM0020	RLM0020
Quartz sleeve	QS0001	QS0001
Electrical part	EPM0020	EPM0020
Controlbox	CBT0001	CBT0001
Floatswitch incl. SS bracket	3000040	3000040PF
Gearmotor	3000019	3000019
Extension cord Floatswitch (2m)	3001084	3001084
Internal rinsepump	3001081	3001081
Japanese mats cassette	3001135	3001135
Filterscreen 70micron standard	ZS00001B (20pcs)	ZS00001B (20pcs)
Filterscreen 70micron High-flow	ZH00001B (20pcs)	ZH00001B (20pcs)
Filterscreen 120micron standard	ZS00003B (20pcs)	ZS00003B (20pcs)
Filterscreen 120micron High-flow	ZH00003B (20pcs)	ZH00003B (20pcs)

ADVANTAGES

- Very low build-in height.
- Plug & Play.
- Brass (angled) nozzles.
- Original Japanese mats inside.
- Max. flow 15 m³/h.

FILTREAU™ UV-C POOL BASIC



Filtreau UV-C Pool Basic	16W / UVB0001	40W / UVB0002	80W / UVB0003
Rc. flow for 30 mJ/cm ²	12 m ³ /h	18 m ³ /h	22 m ³ /h
Max. pressure	3.0 bar	3.0 bar	3.0 bar
Diameter unit Ø	88.9 mm	88.9 mm	88.9 mm
Length unit	600 mm	1.000 mm	1.000 mm
Diameter in-outlet Ø	63/50/40/32/25 mm	63/50/40/32/25 mm	63/50/40/32/25 mm
Housing	SS 316	SS 316	SS 316
Electronic ballast	230V AC 50/60 Hz	230V AC 50/60 Hz	230V AC 50/60 Hz
Maximum current	0,425 A	0,425 A	0,8 A
Lamp power	16W	40W	80W
Lifespan lamp	9.000 h	9.000 h	9.000 h
Indicator	-	-	-
Quantity full pallet	40	30	30

Spareparts	16W / UVB0001	40W / UVB0002	80W / UVB0003
Replacement lamp	RLB0001	RLB0002	RLB0003
Quartz sleeve	QS0001	QS0002	QS0002
Electrical part	EPB0001	EPB0002	EPB0003
Housing	HOU0001	HOU0002	HOU0002

ADVANTAGES

- Made in The Netherlands.
- Perfectly matched electronic ballast and UV-C lamp.
- Extra-large INOX 316L reactor, for longer contact time.
- Polished interior results in 35% more UV-C radiation.
- Bottom outlet, for easy installation.
- Energy efficient and environmentally friendly.
- 2 Year warranty on manufacturing defects.
- 30 mJ/h at recommended waterflow.

FILTREAU™ UV-C SELECT



Filtreau UV-C Select	40W / UVS0001	80W / UVS0002	120W Amalgam / UVS0003
Rc. flow for 30 mJ/cm ²	18 m ³ /h	22 m ³ /h	28 m ³ /h
Max. pressure	3.0 bar	3.0 bar	3.0 bar
Diameter unit Ø	88.9 mm	88.9 mm	88.9 mm
Length unit	600 mm	1.000 mm	1.000 mm
Diameter in-outlet Ø	63 mm	63 mm	63 mm
Housing	SS 316	SS 316	SS 316
Electronic ballast	230V AC 50/60 Hz	230V AC 50/60 Hz	230V AC 50/60 Hz
Maximum current	0,425 A	0,8 A	1.2 A
Lamp power	40W	80W	120W Amalgam
Lifespan lamp	12.000 h	12.000 h	12.000 h
Indicator	✓	✓	✓
Quantity full pallet	30	30	30

Spareparts	40W / UVS0001	80W / UVS0002	120W Amalgam / UVS0003
Replacement lamp	RLS0001	RLS0002	RLS0003
Quartz sleeve	QS0002	QS0002	QS0002
Electrical part	EPS0001	EPS0002	EPS0003
Housing	HOU0004	HOU0004	HOU0004

ADVANTAGES

- Made in The Netherlands.
- LED indication when the lamp needs replacing.
- Extreme high-output UV-C lamp incl. long-life technology (12.000 Hours).
- Perfectly matched electronic ballast and UV-C lamp.
- Extra-large INOX 316L reactor, for longer contact time.
- Polished interior results in 35% more UV-C radiation.
- Bottom outlet, for easy installation.
- Energy efficient and environmentally friendly.
- 2 Year warranty on manufacturing defects.
- 47 mJ/h at recommended waterflow.



The Filtreau UV-C Titan ensures crystal-clear water. The sophisticated design and high quality materials produce high UV-C radiation with a wavelength of precisely 253.7nm. This high level of radiation kills almost all bacteria, viruses and even fungi, providing clear and clean water. As a result, the level of added chemicals (e.g. chlorine) can be reduced drastically.

Due to the extra-wide DUPLEX housing, the water stays in contact with the UV-C radiation for an extra-long time. This broad housing also ensures that there is minimal pressure loss during the water treatment. The reactor is polished on the inside to minimize the chance of any dirt sticking to the walls. Overall, this increases the effectiveness of the UV-C radiation 35%.

The Filtreau UV-C Titan is especially developed for salt-water pools. Thanks to the DUPLEX reactor, the salt has absolutely no corrosive influence.

The intelligent electronics indicates when the lamp is not producing enough radiation and needs to be changed. Your device will always be working perfectly!

Types

Filtreau UV-C Titan 40W / 40m3

Filtreau UV-C Titan 80W / 80m3

Filtreau UV-C Titan 120W Amalgam / 120m3

ADVANTAGES

- Made in The Netherlands.
- Especially developed for saltwater pools.
- LED indication when the lamp needs replacing.
- Extreme high-output UV-C lamp incl. long-life technology (12.000 Hours).
- Perfectly matched electronic ballast and UV-C lamp.
- Extra-large DUPLEX reactor, for longer contact time.
- Polished interior results in 35% more UV-C radiation.
- Bottom outlet, for easy installation.
- Energy efficient and environmentally friendly.
- 2 Year warranty on manufacturing defects.



The Filtreau UV-C Slim ensures crystal-clear water. The sophisticated design and high quality materials produce high UV-C radiation with a wavelength of precisely 253.7nm. This high level of radiation kills almost all bacteria, viruses and even fungi, providing clear and clean water. As a result, the level of added chemicals (eg chlorine) can be reduced by up to 80%, which ensures more natural, healthier water!


The 1.5mm, SS316 housing is polished on the inside to minimize the chance of any dirt sticking to the walls.

Overall, this increases the effectiveness of the UV-C radiation 35%

Because of the “Slim” design and 5 different in/outlets (even bottom-outlet!), it will ensure you that it can be installed even in the most narrow places.

Types

- Filtreau UV-C Slim 40W / 40m3
- Filtreau UV-C Slim 80W / 80m3

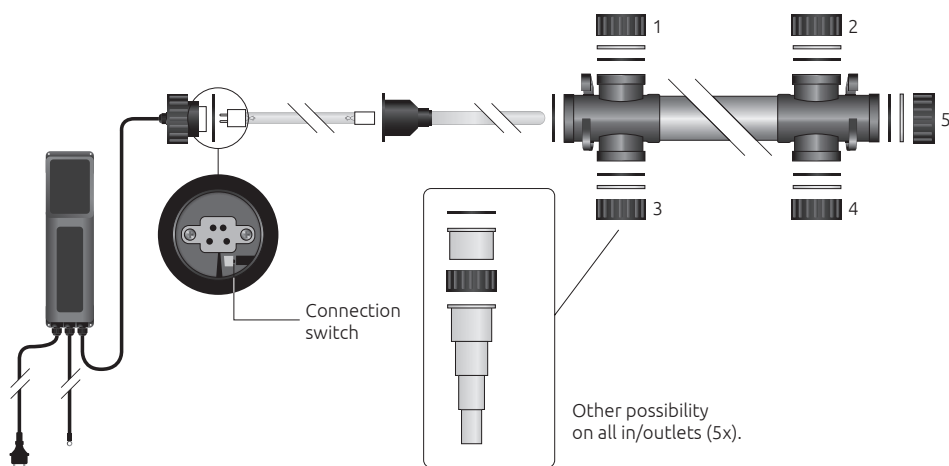

ADVANTAGES


- Made in The Netherlands.
- Perfectly matched electronic ballast and UV-C lamp.
- SS316 Housing.
- Polished interior results in 35% more UV-C radiation.
- 5 Different in/outlets (bottomoutlet).
- Energy efficient and environmentally friendly.
- 2 Year warranty on manufacturing defects.
- Incl. reduction pieces 63 / 50 / 40 / 32 / 25.
- Slim design, to install in even the most narrow places.



Ozone is one of the most effective water treatment sterilizers. Ozone has a very strong oxidation and sterilization effect on all organic substances and eliminates objectionable odours. It is for exactly these reasons that it has been used to disinfect drinking water and air for decades and is used in the food industry. Combined with UV-C radiation, this results in clean, oxygen rich, crystal clear water.

Types



- Filtreau UV-C Ozone 80W / 80m3
- Filtreau UV-C Ozone 120W Amalgam / 120m3

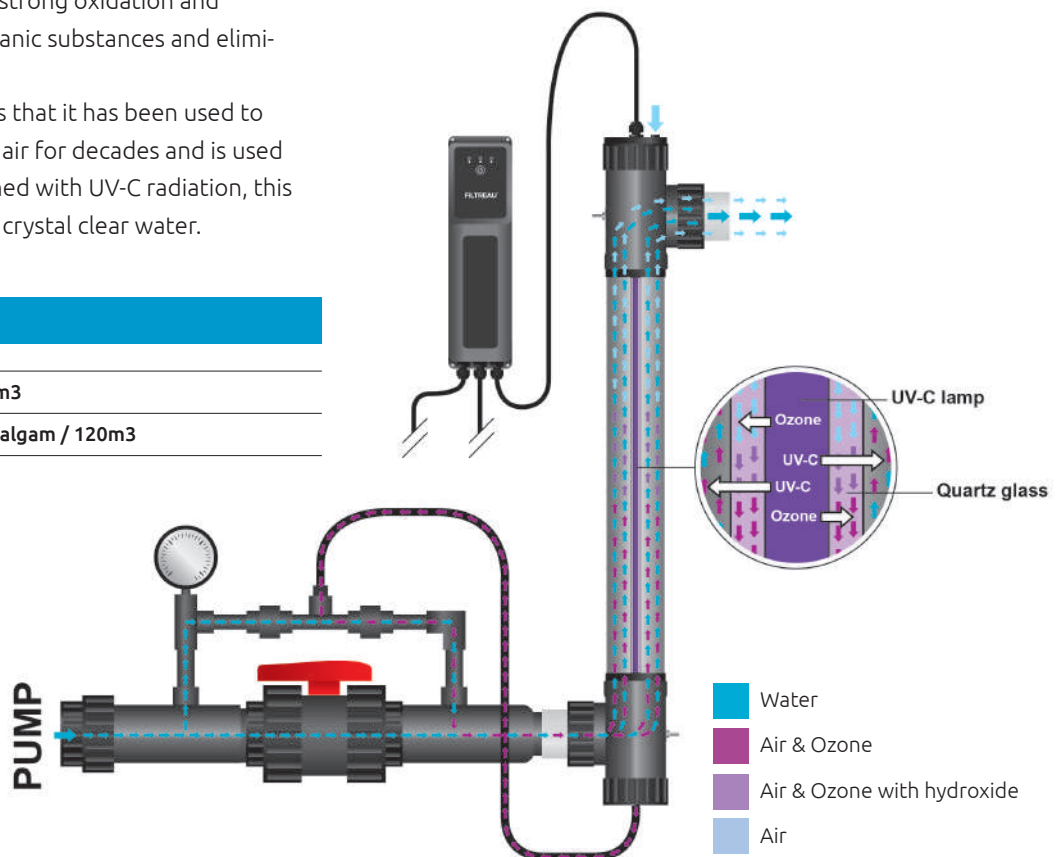

ADVANTAGES


- Made in The Netherlands.
- LED indication when the UV-C Ozone lamp needs replacing.
- Reduces chlorine and other chemicals up to 90%!
- DUPLEX housing, saltwater resistant.
- Compact, easy installation.
- Energy efficient and environmentally friendly.
- 2 Year warranty on manufacturing defects.

FILTREAU™ OZONE 16W

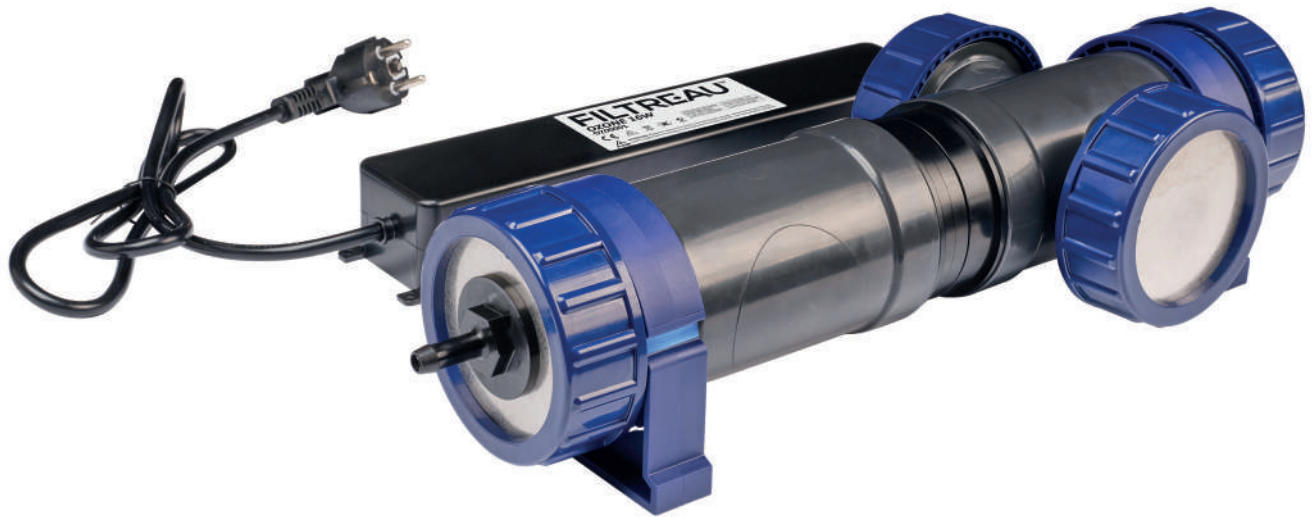

Filtreau Ozone	16W / OZON01
Max. Pressure	1.0 bar
Length unit	395 mm x 155 mm
Electrical	EPO0016
Lamp power	16W
Lifespan lamp	8.000 h
Quantity full pallet	60

Spareparts	16W / OZON01
Replacement lamp	3000729
Electrical part	EPO0016

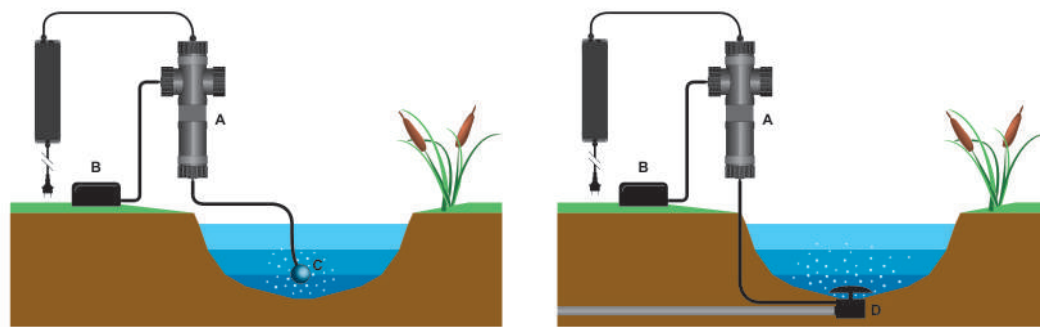

A: FILTREAU OZONE 16W B: AIRPUMP C: AIRSTONE D: BOTTOMDRAIN



ADVANTAGES

- 0,2 gram / hour
- Large reactor ensures optimal operation and contact time
- Suitable for a pond of 5 to 100 m3
- Made in the Netherlands

FILTREAU™ UV-C COPPER IONIZER




This revolutionary combination of UV-C and copper ionization can realise a complete disinfected pool without any addition of chlorine! You will only test your pool water once every two weeks with the supplied test strips. If necessary, easily adjust the device to the correct level in only 1 handling.

With the Filtreau UV-C Copper Ionizer, a max. dose of 0,7 ppm will be enough to fully and safely disinfect your water. This highly efficient device is able to reduce the chlorine concentration up to 100%!

Types

Filtreau UV-C Copper Ionizer 40W / 40m3

Filtreau UV-C Copper Ionizer 80W / 80m3

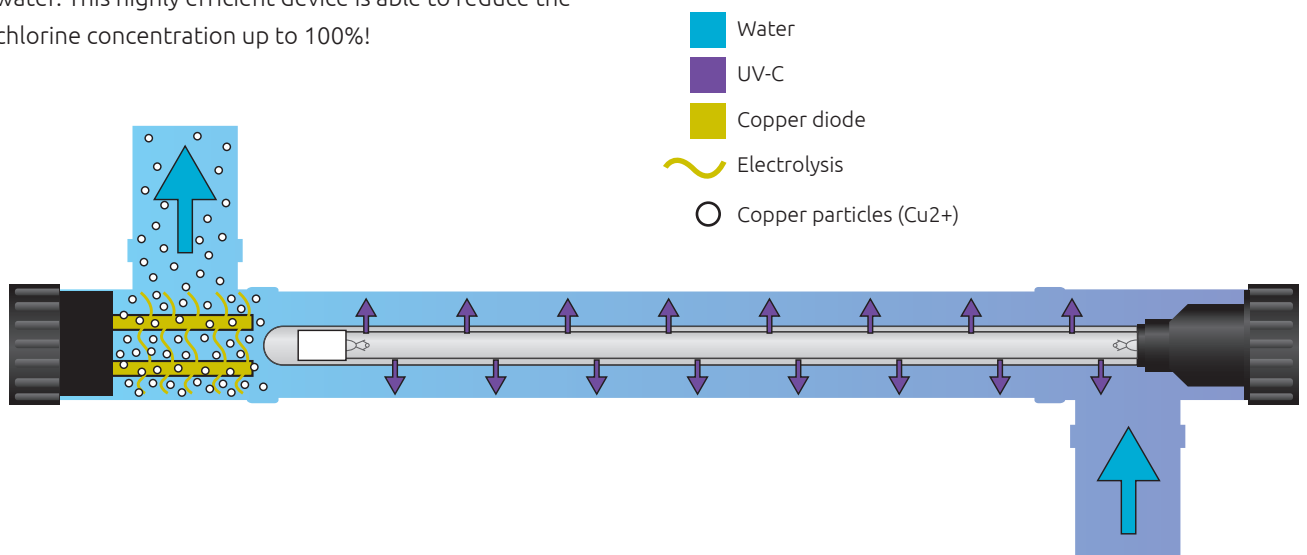

ADVANTAGES

- Made in The Netherlands.
- LED indication when the UVC and Copper needs replacing.
- Copper can be controlled from 0/100% output.
- Reduces chlorine and other chemicals up to 95%!
- SS316 Housing.
- Up to 35% more UV-C produced by reflection.
- Energy efficient and environmentally friendly.
- 2 Years warranty on manufacturing defects.



FILTREAU BULBS

RLE0001	Replacement lamp Filtreau UV-C 16W Eco
RLE0002	Replacement lamp Filtreau UV-C 40W Eco
RLE0003	Replacement lamp Filtreau UV-C 80W Eco
RLB0001	Replacement lamp Filtreau UV-C 16W Pond Basic
RLB0002	Replacement lamp Filtreau UV-C 40W Pond Basic
RLB0003	Replacement lamp Filtreau UV-C 75W Pond Basic
RLS0001	Replacement lamp Filtreau UV-C 40W Select/Titan
RLS0002	Replacement lamp Filtreau UV-C 80W Select/Titan
RLS0003	Replacement lamp Filtreau UV-C 120W Amalgam Select/Titan
RLM0001	Replacement lamp Filtreau UV-C 40W Amalgam
RLM0002	Replacement lamp Filtreau UV-C 80W Amalgam
RLM0020	Replacement lamp Filtreau UV-C 40W High-Output
RLM0021	Replacement lamp Filtreau UV-C 80W High-Output

FILTREAU QUARTZSLEEVES

QS0001	Filtreau quartz sleeve suitable for all 16W and 40W Amalgam/High-Output types (short)
QS0002	Filtreau quartz sleeve suitable for all 40W/80W/120W types (long)
QS0003	Filtreau quartz sleeve suitable for all 80W Amalgam/High-Output types (middle)
QS0005	Filtreau quartz sleeve suitable for Inox Module 40W Amalgam/High-Output
QS0006	Filtreau quartz sleeve suitable for Inox Module 80W Amalgam/High-Output

UNIVERSAL BULBS, suitable in other brands of UV-C devices (please contact for more info)

RLU0001	Lamp 40W (red base) 643 mm length, long-pin
RLU0002	Lamp 75W (red base) 643 mm length, short-pin
RLU0003	Lamp 40W (pink base) 843 mm length, long-pin
RLU0004	Lamp 75W (pink base) 843 mm length, long-pin
RLM0001PH	Lamp 40W Amalgam (standard base)
RLM0002PH	Lamp 80W Amalgam (standard base)

UNIVERSAL QUARTZSLEEVES, suitable in other brands of UV-C devices (please contact for more info)

3000714	Quartz sleeve for TL-systems 30W/55W 27x30x871mm
3000410	O-ring (seal) for TL-systems 29x4 NBR